

RACK AND PINION GOODS ONLY HOIST

GLI50-2m, GLI50-3.2m, GLI50LSM-2m, GLI50LSM-3.2m

TECHNICAL DATA

CAPACITY	GLI50-2m	GLI50-3.2m	GLI50LSM-2m	GLI50LSM-3.2m
Payload capacity	1500 kg	1200 kg	1500 kg	1200 kg
Erection load	880 kg	600 kg	880 kg	600 kg
Speed	21 m/min	21 m/min	21 m/min	21 m/min
Maximum lifting height	100 m	100 m	100 m	100 m
Maximum tie space	9 m	9 m	9 m	9 m

DIMENSIONS


Internal width x length 'A'	1.5 x 2 m	1.5 x 3.2 m	1.4 x 2 m	1.4 x 3.2 m
Base width by length 'B'	2.9 x 2.5 m	2.9 x 3.7 m	2.9 x 2.5 m	2.9 x 3.7 m
End opening width	1,5 m	1,5 m	1,5 m	1,5 m
Mast section length	1,73 m	1,73 m	1,73 m	1,73 m

ELECTRICAL DATA

Power supply	400V 3Ph 50 Hz	400V 3PH 50 Hz	400V 3PH 50 Hz	400V 3PH 50 Hz
Power supply fuses	63 A	63 A	63 A	63 A
Rated power cont.duty	2 x 5.5 kW	2 x 5.5 kW	2 x 5.5 kW	2 x 5.5 kW
Rated power 25% int.duty	2 x 6.5 kW	2 x 6.5 kW	2 x 6.5 kW	2 x 6.5 kW
Starting current	147 A	147 A	147 A	147 A
Running current	21 A	21 A	21 A	21 A
Power consumption	20 kVA	20 kVA	20 kVA	20 kVA

WEIGHTS

Base unit and enclosure	1970 kg	2310 kg	2110 kg	2450 kg
Mast section	90 kg	90 kg	90 kg	90 kg

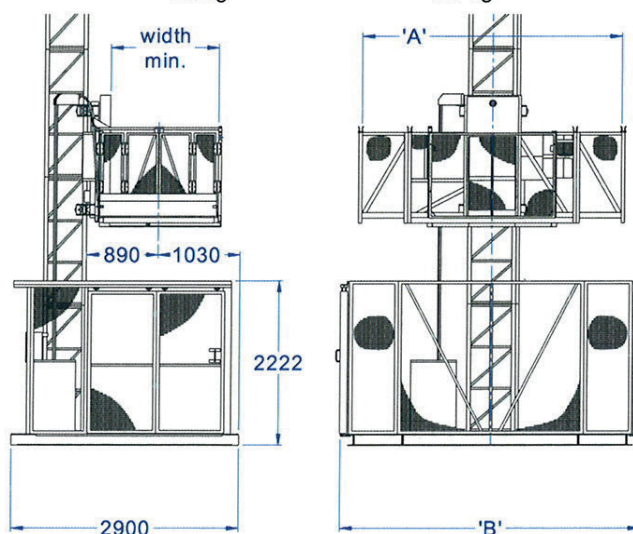

Depots at Sheffield, St. Neots, Leeds & Glasgow